

OUTDOOR SENSORS



MINI SENSOR



TUFF DOME



GOTCHA



LUMINATOR

- Surge protection
- Quick test time
- Vandal resistant
- Color matched lens
- Protected manual override
- White or bronze finish

Quality tested



Floodlight kits come **Completely Assembled** And Pre-Wired For Quick Installation



Make the Switch to **LED**
Save energy Save money
See LED pages 22-23 for details

| Catalog # | Black | White | Detection Pattern |
|-----------|-------|-------|-------------------|
|-----------|-------|-------|-------------------|

| | | | |
|-------|--------|------|--|
| GT500 | GT500W | 110° | <ul style="list-style-type: none"> • 110° view sensor with the features that professionals trust • 500W switching capacity @120V, Incandescent, 150W Fluorescent • 6000 Volt surge protection • Temperature compensation • Protected manual override with auto reset • 5 Year Warranty |
|-------|--------|------|--|

Patents: The design of the Gotcha Sensor is protected by Canadian Patent 119244, China Patent ZL200730002266, and Taiwan Patents D123958.

| Bronze | White | Detection Pattern |
|--------|-------|-------------------|
|--------|-------|-------------------|

| | | | |
|--------|---------|------|---|
| GT500R | GT500RW | 110° | <ul style="list-style-type: none"> • Gotcha Sensor with c2 weatherproof, corrosion-resistant polycarbonate floods • Molded gaskets • Corrosionproof universal cover plate • Suitable for wet locations • 500 Watt Incandescent switching capacity • Lights deactivate during daylight |
|--------|---------|------|---|

Consider LED Replacement

STLHBLEd2x13W

Gotcha! Plus



Gotcha! Kit



LUMINATOR



| | | | |
|-------|--------|------|---|
| LS300 | LS300W | 110° | <ul style="list-style-type: none"> • 110° view sensor with corrosionproof, weatherproof, non-metallic case • 300 Watt switching capacity @120V • Manual override • 3000 Volt surge protection • Auto test logic • 3 Year Warranty |
|-------|--------|------|---|

LUMINATOR Kit



TUFF Dome™



Mini Sensor™



Smart Box®



SQB1 Light Kit®



SQB2 Light Kit®



| Catalog # | Bronze | White | Detection Pattern |
|-----------|--------|-------|---|
| LU300 | LU300W | 110° | <ul style="list-style-type: none"> • 110° view sensor with corrosionproof, weatherproof, non-metallic case • 300 Watt switching capacity @120V • Manual override • 3000 Volt surge protection • Universal ball swivels for fully adjustable positioning • Auto test logic • 3 Year Warranty • Weatherproof & corrosionproof floods & mounting plate |

Consider LED Replacement

STLHBLEd2x13W

Completely Assembled And Pre-Wired For Quick Installation

| | | | |
|----------|-----------|------|---|
| STUFF500 | STUFF500W | 180° | <ul style="list-style-type: none"> • Vandalproof sensor with 180° detection provides wide side-to-side coverage. • LED detection and "on guard" indicator • Sensor adjusts up and down • Controls up to 500 Watts @120V, Incandescent, 100 Watts Fluorescent • Die-cast aluminum construction • Three 1/2" threaded holes for mounting lighting fixtures • Vandalproof polyethylene lens • 3000 Volt surge protection • Protected manual override with Auto Reset after 8 hours • 5 Year Warranty |
|----------|-----------|------|---|

| | | | |
|--------|---------|------|---|
| SMS500 | SMS500W | 180° | <ul style="list-style-type: none"> • 180° detection pattern in our smallest sensor • 500 Watt switching capacity @120V, Incandescent, 100 Watts Fluorescent • Die-cast aluminum construction • 3000 Volt surge protection • Protected manual override with Auto Reset after 8 hours • 5 Year Warranty |
|--------|---------|------|---|

| | | | |
|-------|--------|------|--|
| ----- | SB500W | 180° | <ul style="list-style-type: none"> • 180° view box mounted sensor fits single gang cast boxes • 500 Watt Incandescent switching capacity, 100 Watt Fluorescent • Easy-to-Read controls • 3000 Volt surge protection • Protected manual override with auto reset after 8 hours • Can be wired in parallel • Integral oversize wall plate included • 5 Year Warranty |
|-------|--------|------|--|


| | | | |
|-------|-------|------|---|
| SQB1A | SQB1W | 180° | <ul style="list-style-type: none"> • 180° view Mini Sensor and 75 Watt Quartz Bullet flood • 500 Watt Incandescent switching capacity, 100 Watt Fluorescent • 3000 Volt surge protection • Protected manual override with auto reset after 8 hours • CU4 oversize wall plate included • 5 Year Warranty |
|-------|-------|------|---|

WPLED20MS

| | | | |
|-------|-------|------|---|
| SQB2A | SQB2W | 180° | <ul style="list-style-type: none"> • 180° view Mini Sensor and (2) 75 Watt Quartz Bullet floods • 500 Watt Incandescent switching capacity, 100 Watt Fluorescent • Silicone O-ring gasket, thick tempered glass lens • 3000 Volt surge protection • Protected manual override with auto reset after 8 hours • CU4 oversize wall plate included • 5 Year Warranty |
|-------|-------|------|---|

STLHBLEd2x13W

DETECTION PATTERNS

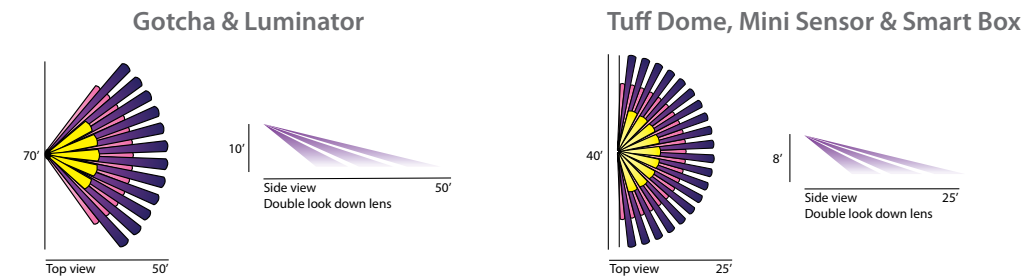

Patents: RAB sensor and fixture designs are protected under U.S. and international intellectual property laws.