









**HEAVY-DUTY**

**18 VOLT SYSTEM ACCESSORIES**



ACCESSORY	CATALOG NO.	DESCRIPTION	TOOLS COMPATIBLE WITH:	
 <p><b>STEEL CARRYING CASE</b></p>	<b>48-55-1516</b>	Heavy-Duty steel carrying case.	6515-20 • 6515-21 • 6515-22 1109-20 • 1109-21 • 3109-21 5361-20 • 5361-21	
	<b>48-55-0830</b>			
	<b>48-55-0556</b>			
 <p><b>IMPACT RESISTANT CARRYING CASE (LARGE)</b></p>	<b>48-55-3000</b>	Heavy-Duty impact resistant carrying case with steel latches.	6515-23 • 6515-24 • 6515-26	
 <p><b>IMPACT RESISTANT CARRYING CASE (SMALL)</b></p>	<b>48-55-3015</b>			All 18 Volt Power-Plus Driver/Drills and Hammer-Drill Drivers
 <p><b>IMPACT RESISTANT D-HANDLE CARRYING CASE</b></p>	<b>48-55-3050</b>			6515-27 • 1109-24 • 3109-24 • 5361-24
 <p><b>IMPACT RESISTANT CIRCULAR SAW CARRYING CASE</b></p>	<b>48-55-1300</b>			6310-20 • 6310-22 • 6310-24
 <p><b>DRILL WRIST STRAP</b></p>	<b>49-17-0425</b>			Heavy-Duty nylon strap attaches to handle of drills listed at right.

**12, 14.4 & 18 VOLT WORK LIGHTS**


**49-24-0160**

- ACCEPTS 18 VOLT POWER-PLUS BATTERIES



**49-24-0150**

- ACCEPTS 12 AND 14.4 VOLT POWER-PLUS BATTERIES

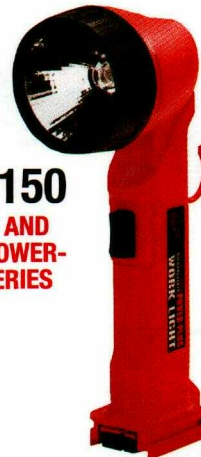

- Rugged Construction For Industrial Use
- 120° Pivoting Head. 30° Down – 90° Up With 10° Positive Detents
- Up to 3 hours Of Illumination Per Charge
- Uniform Light Pattern – No Dark Spots Or Rings
- High Output Xenon Bulb Produces Extremely Bright, Uniform Light
- Accepts 12, 14.4 And 18 Volt Milwaukee Power-Plus Batteries (Battery not included.)
- Glass Reinforced Nylon Housing And Bezel Withstands Rough Handling
- Polycarbonate Lens Resists Abrasion And Impact
- Trigger Style On-off Switch With Intermittent Position
- Extra Bulb Stored Under Lens Cap
- Dual Position Hanging Hook Included

**SPECIFICATIONS**

CATALOG NUMBER	VOLTS DC	BRIGHTNESS (LUX)	MAX. RUN TIME (MIN./CHARGE)	LENGTH (IN.)		NET WEIGHT (LBS.)	SHIP WEIGHT (LBS.)
				HEAD UP	HEAD DOWN		
49-24-0160	18	365	180	11.6	9.6	.75	1.2
49-24-0150	12/14.4	284/360	180	11.6	9.6	.75	1.2

STANDARD EQUIPMENT: FOR 49-24-0150 AND 49-24-0160: Work Light, Hanging Hook and Replacement Xenon Bulb.

**LIGHT BULB REPLACEMENT** on Work Light 49-24-0160  
49-81-0030