

DRYCONN®

WATERPROOF CONNECTORS


Filled Connectors for Direct Bury Use



Installation Instructions

IMPORTANT: Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.

1. Strip wires 3/4" (19.1mm).
2. Align any frayed strands or conductors.
3. Pre-twisting unnecessary. Place stripped wires together with ends of insulation even.
4. Twist connector onto wires pushing firmly until hand-tight. Do not over torque.
5. Wipe sealant in and around conductors and connector opening while tightening.

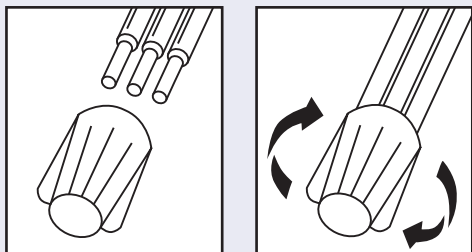

U.S. Pat. 5,771,578. All other trademarks, U.S. and Foreign Patents apply. All Rights Reserved.

DryConn® King 9 Blue

Catalog #	Selling Unit
10975	Box of 75
10990	Card of 2
10999	Bag of 8

PRODUCT SPECIFICATIONS & MEASUREMENTS

Max. Voltage: 600V max. building wire
(1000V max. signs or luminaries)

Connector Size: 2 13/32" x 63/64"

Wire Type: Copper/Copper

Wire Range: Min #14/Max #6

Temperature Rating: 105°C (221°F)

Silicone Sealant Temperature: -45°F to 400°F


UL Designation: LDB*

Measurements (Inches):

A - 2.41

B - 0.99

C - 0.78

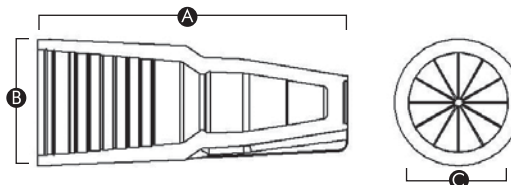

- UL 486D Listed as a sealed wire connector system. For use in damp, wet, rain tight, submersible and direct bury locations. Not to be used in continuous submersion applications.

Selected 600V Wire Combinations

1 or 2 #6	2-3 #8	2 #6 w/1 #10 or 1 #12
2-5 #10	1 #10 w/2-4 #12	2 #6 w/1 or 2 #14
3-6 #12	1 #10 w/3-5 #14	4 #12 w/1 #14

Contact factory for a complete list of wire combinations at 800.633.0232.